






























Installation Dimension Drawings

UVC-1A

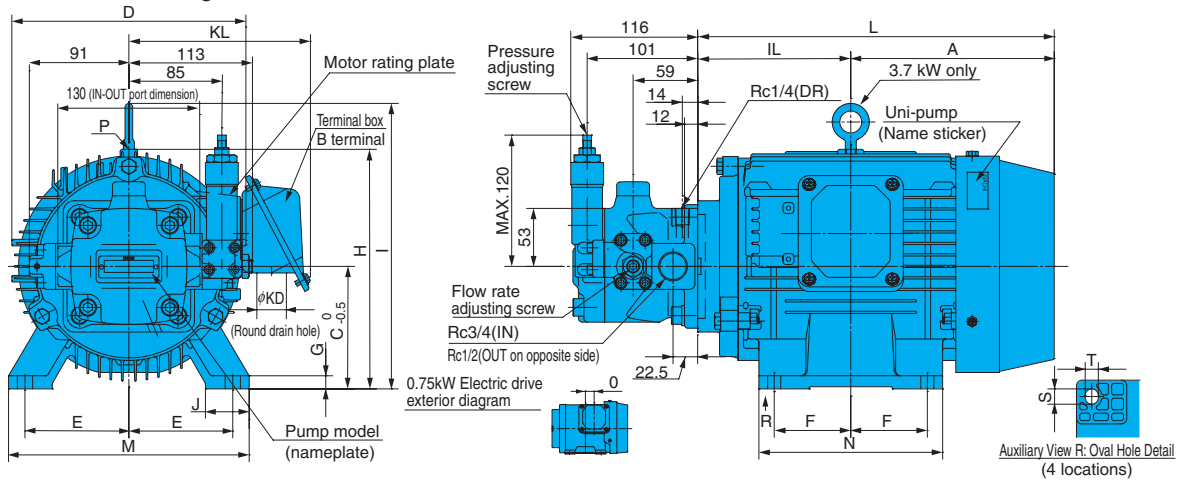


Uni-pump	Motor Dimensions mm																	Frame No.	Output kW (4 poles)	Weight kg
	A	IL	C	D	E	F	G	H	I	J	L	M	N	S×T	KD	KL	O			
UVC-1A-A2-0.75-4-30	133	105	80	170	62.5	50	4.5	165	-	35	238	165	130	18×10	φ27	157	27.5	80M	0.75	24
UVC-1A-A2-1.5-4-30	143	118.5	90	198	70	62.5	10	190	-	40	261.5	176	150	12×10	φ27	159	-	90L	1.5	25.5
UVC-1A-A3-1.5-4-30																				
UVC-1A-2A2-1.5-4-30	157.5	133	100	198	80	70	12	200	-	40	290.5	200	168	14×12	φ27	159	-	100L	2.2	30.5
UVC-1A-A2-2.2-4-30																				
UVC-1A-A3-2.2-4-30	186	140	112	214	95	70	12	-	261	40	326	220	168	14×12	φ27	166	-	112M	3.7	36.5
UVC-1A-A3-3.7-4-30																				
UVC-1A-2A2-3.7-4-30	186	140	112	214	95	70	12	-	261	40	326	220	168	14×12	φ27	166	-	112M	3.7	36.5
UVC-1A-A4-3.7-4-30																				
UVC-1A-2A3-3.7-4-30	186	140	112	214	95	70	12	-	261	40	326	220	168	14×12	φ27	166	-	112M	3.7	36.5
UVC-1A-2A3-3.7-4-30																				

0.75 to 2.2kW model does not have hangers.

1. Standard drive motor is the fully enclosed fan-cooled B type.
2. Standard voltage for drive motor is 200 VAC, 50/60 Hz or 220 VAC, 60 Hz.
3. Standard terminal box is B terminal (right side viewed from pump).
4. See page A-21 for the characteristics of the drive motor for the unipump (domestic standard 3 rating).

UVC-11A

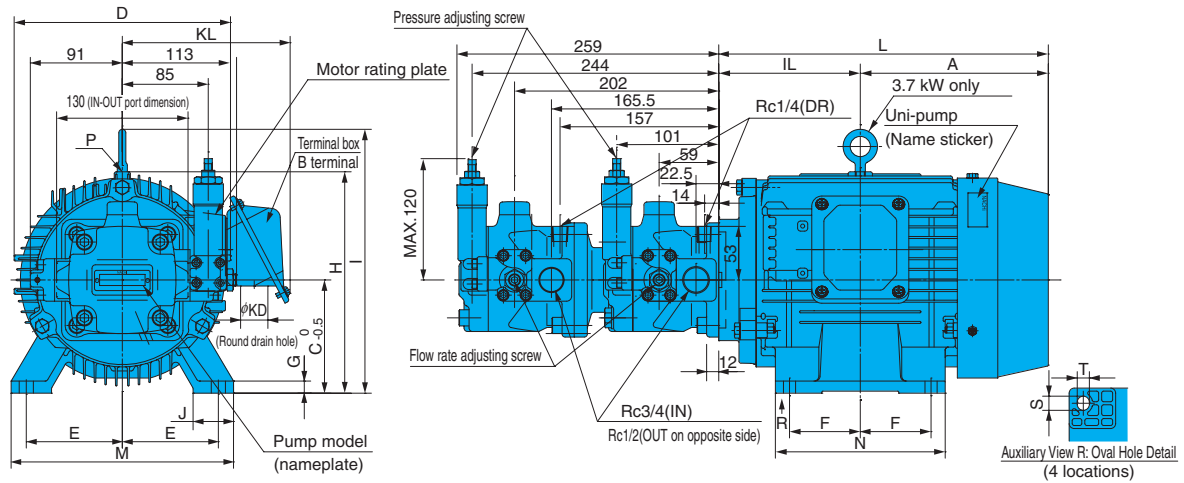

Uni-pump	Motor Dimensions mm																	Frame No.	Output kW (4 poles)	Weight kg
	A	IL	C	D	E	F	G	H	I	J	L	M	N	S×T	KD	KL				
UVC-11A-A2-A2-1.5-4-30	143	118.5	90	198	70	62.5	10	190	-	40	261.5	176	150	12×10	φ27	159	90L	1.5	36	
UVC-11A-A2-A3-1.5-4-30																				
UVC-11A-A3-A3-1.5-4-30	157.5	133	100	198	80	70	12	200	-	40	290.5	200	168	14×12	φ27	159	100L	2.2	41	
UVC-11A-A2-A2-2.2-4-30																				
UVC-11A-A2-A3-2.2-4-30	186	140	112	214	95	70	12	-	261	40	326	220	168	14×12	φ27	166	112M	3.7	47	
UVC-11A-A3-A3-2.2-4-30																				
UVC-11A-2A2-2A2-2.2-4-30	186	140	112	214	95	70	12	-	261	40	326	220	168	14×12	φ27	166	112M	3.7	47	
UVC-11A-A2-A2-3.7-4-30																				
UVC-11A-A2-A3-3.7-4-30	186	140	112	214	95	70	12	-	261	40	326	220	168	14×12	φ27	166	112M	3.7	47	
UVC-11A-A3-A3-3.7-4-30																				
UVC-11A-2A2-2A2-3.7-4-30	186	140	112	214	95	70	12	-	261	40	326	220	168	14×12	φ27	166	112M	3.7	47	
UVC-11A-2A2-2A3-3.7-4-30																				

No hanger on 1.5 and 2.2 kW models.

1. Standard drive motor is the fully enclosed fan-cooled B type.
2. Standard voltage for drive motor is 200 VAC, 50/60 Hz or 220 VAC, 60 Hz.
3. Standard terminal box is B terminal (right side viewed from pump).
4. See page A-21 for the characteristics of the drive motor for the unipump (domestic standard 3 rating).